



LED LIGHT FIXTURE FOR GENERAL USE

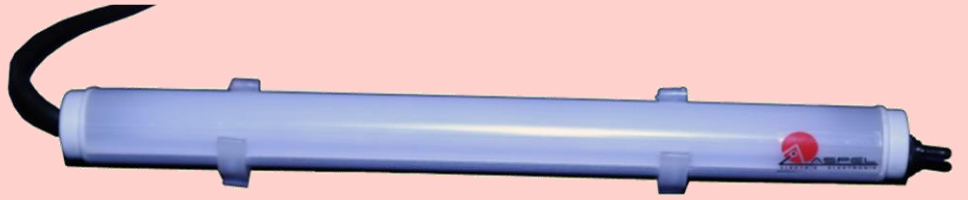

General Features

| | | | | |
|-------------------------|---|---|--------------------|------------------|
| Product code | : | PL-09 | PL-09S | PL-09A |
| Description | : | Direct connect | with on-off switch | Auto. ON-OFF (*) |
| Supply voltage | : | 10-28Vdc | | |
| Power | : | ~6W | | |
| Light source | : | Power SMD LED | | |
| Protection class | : | IP44 | | |
| Connection | : | With 500mm TTR cable | | |
| Assembly | : | With two screw/Clips holder | | |
| Dimensions | : | L:345mm x R:30mm (option: different length) | | |

(*) Please refer to user manual.

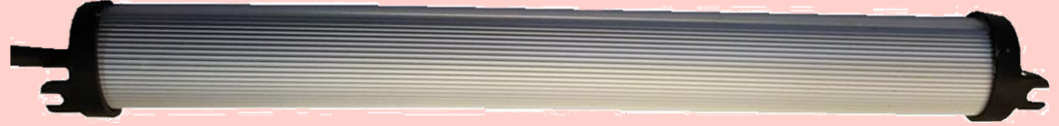

General Features

| | | | | |
|-------------------------|---|-----------------------------|--------------------|--|
| Product code | : | PL-09-220 | PL-09S-220 | |
| Description | : | Direct connect | with on-off switch | |
| Supply voltage | : | 220Vac \pm 5% 50Hz | | |
| Power | : | ~7W | | |
| Light source | : | Power SMD LED | | |
| Protection class | : | IP44 | | |
| Connection | : | With 500mm TTR cable | | |
| Assembly | : | With two screw/Clips holder | | |
| Dimensions | : | L:345mm x R:30mm | | |

General Features

| | | | | |
|-------------------------|---|-----------------------------|--------------------|--|
| Product code | : | PL-09-110 | PL-09S-110 | |
| Description | : | Direct connect | with on-off switch | |
| Supply voltage | : | 110Vac \pm 5% 50-60Hz | | |
| Power | : | ~7W | | |
| Light source | : | Power SMD LED | | |
| Protection class | : | IP44 | | |
| Connection | : | With 500mm TTR cable | | |
| Assembly | : | With two screw/Clips holder | | |
| Dimensions | : | L:345mm x R:30mm | | |

60-79 PL-09A

ASPEL

Elektrik Elektronik
San. ve Tic. Ltd. Sti.
Istanbul/Turkiye
Tel : +90216 660 0345
Fax : +90216 660 0346
info@aspel.com.tr
www.aspel.com.tr

